

# DELACCO

## MATERIAL HANDLING

ELECTRIC STACKER

EDS1200-M160-400 | 1200 kg

Delacco EDS pedestrian stacker is a cost-effective full electric stacker for everyday use. It is a compact, flexible and lightweight full electric walkie stacker.

- FULL ELECTRIC WALKIE STACKER
- LIFTING HEIGHT 1600-4000 MM
- COMPACT DESIGN
- CURTIS STEERING SYSTEM
- PIN CODE LOCK
- BUILT IN CHARGER
- MAINTENANCE FREE BATTERIES
- EDS1200 2700, 3600 & 4000 ARE AVAILABLE WITH 60AH LITHIUM BATTERY



EDS1200-M160

EDS1200-M400


[WWW.DELACCO.HR](http://WWW.DELACCO.HR)

DELACCO d.o.o. Slavenska avenija 24/6, 10000 Zagreb  
OIB: 61037617977, MBS: 081405603  
Uprava: Marko Jelavić  
TS u Zagrebu - TK 20.000 kn uplaćen u cijelosti

Banka: Erste&Steiermärkische Bank d.d.  
IBAN: HR2924020061101064160 - BIC: ESBCHR22  
Web/mail: <https://delacco.com> - [sales@delacco.com](mailto:sales@delacco.com)  
Mobitel: +385 91 25 50 100 / 20 40 800

#### TECHNICAL INFORMATION

Art. nr	EDS1200-M160	EDS1200-M270	EDS1200-M330	EDS1200-M360	EDS1200-M400
Type	Walkie	Walkie	Walkie	Walkie	Walkie
Capacity (kg)	1200	1200	1200	1200	1200
Lifting height (mm)	1600	2700	3300	3600	4000
Dimensions (LxBxH) (mm)	1755x795x1990	1755x795x1845	1755x795x2140	1755x795x2300	1755x795x2495
Ground clearance (mm)	26	26	26	26	26
Fork dimensions (LxBxH) (mm)	1150x160x60	1150x160x60	1150x160x60	1150x160x60	1150x160x60
Outer fork width (mm)	570	570	570	570	570
Weight (kg)	390	458	482	496	512
Wheel type	PU/PU	PU/PU	PU/PU	PU/PU	PU/PU
Steering wheel (mm)	Ø210x70	Ø210x70	Ø210x70	Ø210x70	Ø210x70
Fork wheel (mm)	Ø80x70	Ø80x70	Ø80x70	Ø80x70	Ø80x70
Balance wheel (mm)	Ø150x58	Ø150x58	Ø150x58	Ø150x58	Ø150x58
Wheels (x=driving wheel)	1x+1/4	1x+1/4	1x+1/4	1x+1/4	1x+1/4
Load center (mm)	600	600	600	600	600
Height - mast extended (mm)	2014	3152	3752	4052	4452
Aisle width for pallets 1000x1200 sideways (mm)	2245	2245	2245	2245	2245
Aisle width for pallets 800x1200 sideways (mm)	2185	2185	2185	2185	2185
Turning radius (mm)	1405	1405	1405	1405	1405
Travel speed laden - unladen (km/h)	4,0 - 4,2	4,0 - 4,2	4,0 - 4,2	4,0 - 4,2	4,0 - 4,2
Lift speed laden - unladen (cm/s)	9,2 - 13,6	9,2 - 13,6	9,2 - 13,6	9,2 - 13,6	9,2 - 13,6
Lowering speed laden - unladen (cm/s)	11,2 - 9,8	11,2 - 9,8	11,2 - 9,8	11,2 - 9,8	11,2 - 9,8
Battery (V/Ah)	2x12/100	2x12/100	2x12/100	2x12/100	2x12/100
Battery type	Maintenance free	Maintenance free	Maintenance free	Maintenance free	Maintenance free
Brakes	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic
Drive motor (kW)	DC 0,75	DC 0,75	DC 0,75	DC 0,75	DC 0,75
Lift motor (kW)	2,2	2,2	2,2	2,2	2,2
Steering system	CURTIS	CURTIS	CURTIS	CURTIS	CURTIS
Pris					

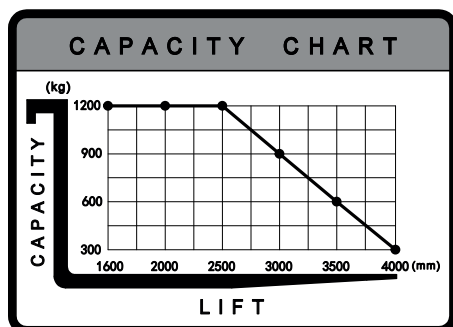

All models equipped with PIN code lock.

WWW.DELACCO.HR